GLORY STAR GROUP LIMITED

Your digital signage partner

www.glorystargroup.com

Glory Star Group Limited

WHO WE ARE?

Glory Star Group Limited was establised in 1980 and headquartered in Hong Kong, with factory plant in Shenzhen, China. The company has over 20 years of experience on developing and producing electronics technology.

We help retail, transportation, industrial, medical, audio visual and defense industries to better use display technologies to increase business and to provide information to their viewers. We are positioned as a display hardware provider for all industries.

WHAT CAN WE OFFER?

Our specialty lies on designing, manufacturing LCD advertising displayers, (3.5”,5.6”,7”.10.2”, 10.4’, 12.1”,15”,17”,19”,22”,26” and 32”), controllers, video posters, touch screens, barcodes, and interative audio controllers.
We also provide OEM/ODM services and total technical support to our customers. With this capability, we are able to provide products that are tailored for your industry and purpose use.

HOW DO WE DO IT ?

Strong R&D

We have a total of 10-15 R&D staff- including hardware and software experienced enginners that can provide continuous breakthroughs. We have the capability to design, advise customers on safety regulations, and materials to be used for production.

Strict Quality Controls

It is Glory Star’s policy to provide products and services that meet customer expectations, requirements and delivery schedules. Our systems implement quality management from the design stage through to delivery and after sales service.

Customization

OEM/ODM- Where hardware and PCB requires to be custom enclosed- Glory Star will undertake the creation of OEM version of products, with your own branded labels.

Total Control of production

Glory Star owns its factory plant that have the capability to produce over 20,000 units monthly. From component choice, PCB board production to metal/plastic housing production are fully controlled by Glory Star. With experienced line workers for careful assembly.

CONTENTS
2011 CATALOG

02 **ABOUT US**
Rental Service
Awards
Certifications

06 **TAD SERIES**
Standard
Open Frame
Portrait

16 **SAL SERIES -** Aluminum made

GAD SERIES - Plastic made

18 **INTERACTIVE**
Button
Lift Series
Bar Codes
Battery operated
Touch Screens

28 **Digital Signage Series**
AVP (LCD Video Poster)
Media Ad Station
Video Controllers
Audio Controllers
POS Displays
Video Catalog
MORE
3D Box
Coin Tray
Shelf Strip
Shelf Talker

38 **MOUTING SYSTEM**
Shelf Mount
Table Mount
Wall Mount
Pole Mount

40 **CONTACT US**

43 **SPECIFICATIONS**

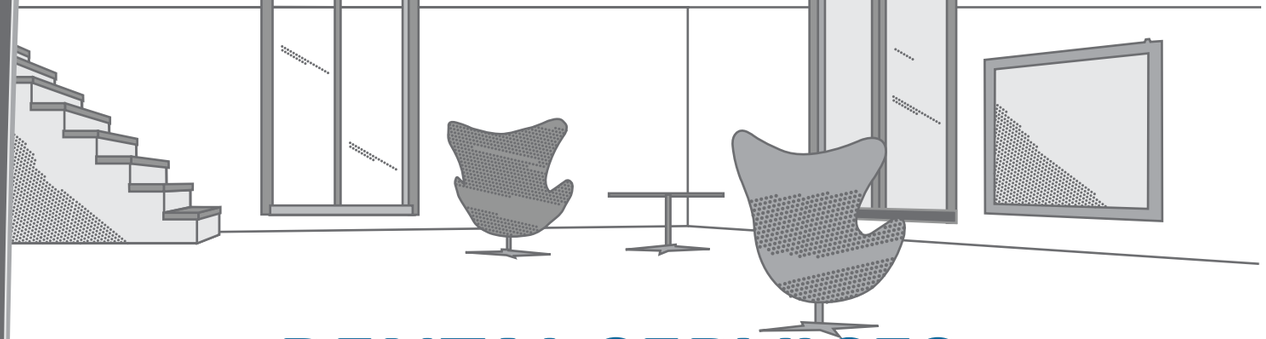

RENTAL SERVICES

Glory Star Group provides LCD Rental Services to Hong Kong local market.

The aim is to provide extra assistance to brands and retailers to cost effectively display their advertisements through professional media hardwares, Most importantly, matching marketing budgets by producing maximum advertising effect. This service also provides excellent project based advertising campaigns.

OUR SERVICE INCLUDE :

- **Full range of digital signage products**
- **Local service within 24 hours**
- **Full installation and set up.**
- **Free consultation**

OUR CERTIFICATE

ISO14000

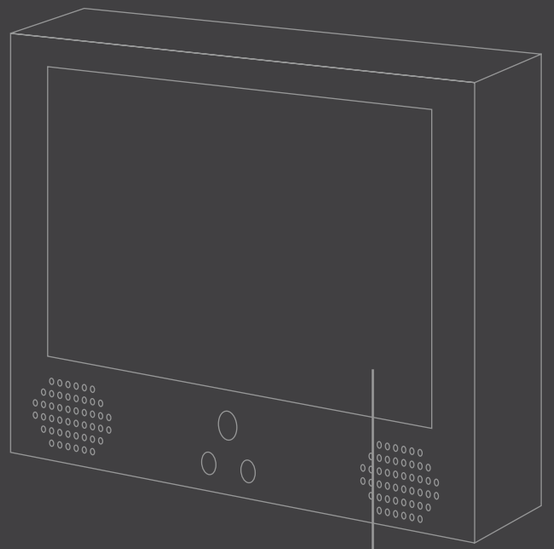

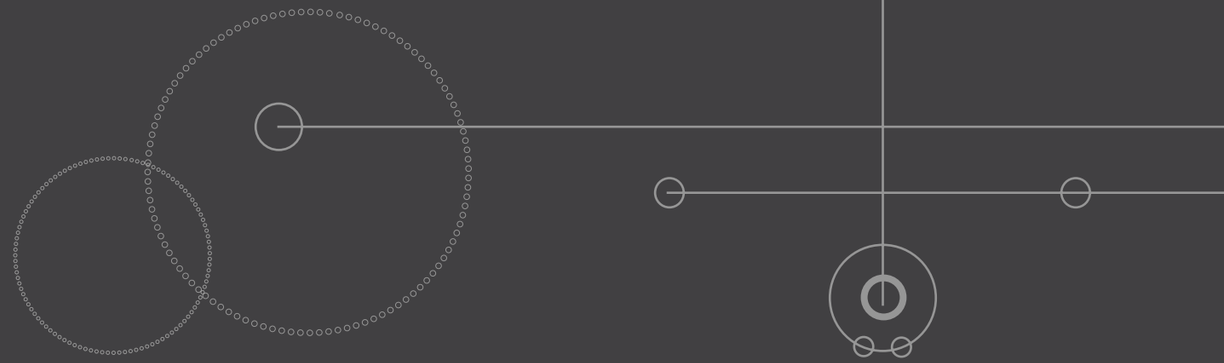

RELIABILITY

- Protective glass & sturdy housing designed for 24/7 playback
- Solid State device with no mechanical moving parts, no fans - the systems deliver more than 5 years 24/7 playback.

EASY UPDATE

- Player will automatically read new contents from USB, you can set password to update.

MOTION SENSOR

- When a person passes by it will activate video playing (30, 60, 90, 360, 45mute secs) - to control noise level at the store

NO MAINTENANCE REQUIRED

- **PLUG & PLAY-** Designed to work straight out of the box. Simply switch the player on, and watch the content play.
- **REDUCED CABLING and INSTANT RESPONSE**

- Metal Housing Motion Sensor
- USB Update
- Screws to lock
- CF/SD card supported
- Anti Tempered Glass (except 7")

THE TAD-SERIES

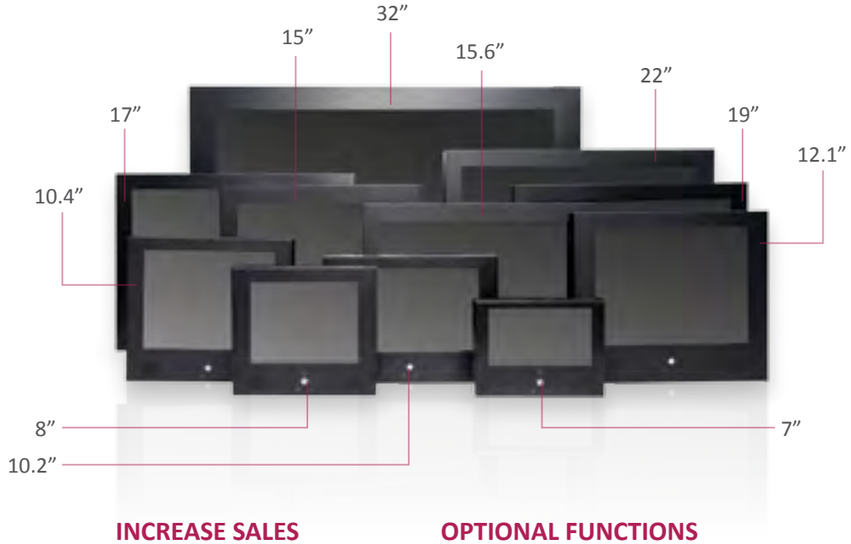

INCREASE SALES

Proven to increase sales within 30%-50% more. Create attention and interaction with customers.

COST EFFECTIVE

Competitively priced with an affordable digital media solution.

SCHEDULING

With daily and weekly time set.

OPTIONAL FEATURES

Touch Screen, Button Interaction, Battery Operation, Lift Interactivity, Barcode Feature

OPTIONAL FUNCTIONS

Pop Up Ad-able to insert ads in between content playing
Scrolling text
Vertical Horizontal Screen adjustment
Real Time Display
Logo Display on each video (adjustable at 4 different corners)
Data logging
Password for menu setting
Password for content changing
Chinese OSD



Acrylic plate to minimize space
USB update

TAD-321

Size	32” TFT LCD, 1366 x 768
Aspect	16:9
Contrast	1200:1
Brightness	500cd/m2
Vesa	100, 200, 600 x 200 mm

TAD-221

Size	22” TFT LCD, 1680 x 1050
Aspect	16:9
Contrast	1000:1
Brightness	300cd/m2
Vesa	100, 200 mm

TAD-191

Size	19” TFT LCD, 1440 x 900
Aspect	16:9
Contrast	700:1
Brightness	300cd/m2
Vesa	75 mm

TAD-171

Size	17” TFT LCD, 1440 x 900
Aspect	16:9
Contrast	500:1
Brightness	250cd/m2
Vesa	75 mm

TAD-156

Size	15.6” TFT LCD, 1366 x 768
Aspect	16:9
Contrast	500:1
Brightness	250cd/m2
Vesa	75 mm

TAD-151

Size	15” TFT LCD, 1024 x 768
Aspect	4:3
Contrast	450:1
Brightness	250cd/m2
Vesa	75 mm

TAD Series Come With

Remote

Adapter

Manual

All Included

Motion sensor, Supports JPEG, MPEG1, 2, 4, Music, Supports either CF Type I/II or SD card, Automatic or password update by USB, Stereo Speakers, Auto-play on startup, Auto repeats.

Optional Shelf, Table, Wall mounts

THE STANDARD TAD

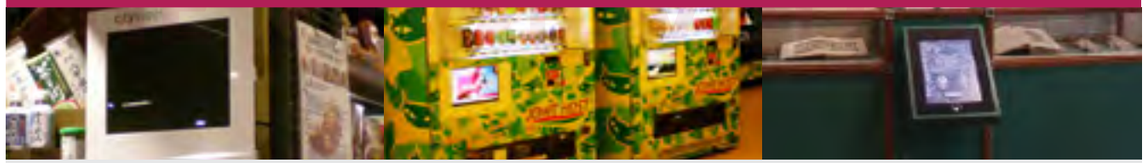

TAD-121

Size	12” TFT LCD, 800 x 600
Aspect	4:3
Contrast	450:1
Brightness	330cd/m2
Vesa	75 mm

TAD-104

Size	10.4” TFT LCD, 800 x 600
Aspect	4:3
Contrast	400:1
Brightness	250cd/m2
Vesa	75 mm

TAD-102

Size	10.2” TFT LCD, 800 x 480
Aspect	16:9
Contrast	300:1
Brightness	250cd/m2
Vesa	75 mm

TAD-082

Size	8.2” TFT LCD, 800 x 480
Aspect	16:9
Contrast	300:1
Brightness	350cd/m2
Vesa	30 x 30, 50 x 50 mm

TAD-081

Size	8.1” TFT LCD, 800 x 600
Aspect	4:3
Contrast	500:1
Brightness	250cd/m2
Vesa	30 x 30, 50 x 50 mm

TAD-073

Size	7” TFT LCD, 800 x 480
Aspect	16:9
Contrast	500:1
Brightness	250cd/m2
Vesa	30 x 30 mm

THE OPEN FRAME

Designed for display integration

HOW TO USE

- 4 fixing holes for easy installation
- Flexible at fitting into your own displays
- No external casings- light weight-ed
- Application- can be placed inside wood, acrylic, MDF, metal mate-rials
- Customization option- able to create own version of open frame at MOQ to fit in slimmer casings
- Protective arylic back- to avoid touching components

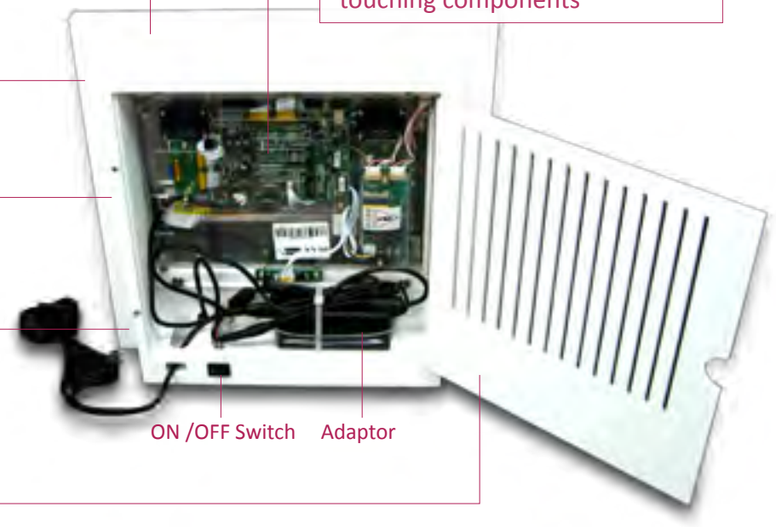

TAD073-NOP

Size	7’ TFT LCD, 800 x 480
Aspect	16:9
Contrast	500:1
Brightness	250cd/m2

TAD081-NOP

Size	8.1” TFT LCD, 800 x 600
Aspect	4:3
Contrast	500:1
Brightness	250cd/m2

TAD104-NOP

Size	10.4” TFT LCD, 800 x 600
Aspect	4:3
Contrast	400:1
Brightness	250cd/m2

TAD151-NOP

Size	15” TFT LCD, 1024 x 768
Aspect	4:3
Contrast	450:1
Brightness	250cd/m2

Optional Features

Button activation
Battery operated
Lift interactivity

Industry

Cosmetic
Jewellery
Watch

Open frame Come With

Remote

Adapter

All Included

Supports JPEG, MPEG1, 2, 4, Music, Supports CF Type I/II or SD card, Automatic or password update by USB, Stereo Speakers, Auto-play on startup, Auto repeats.

Optional

Motion sensor function

THE PORTRAIT

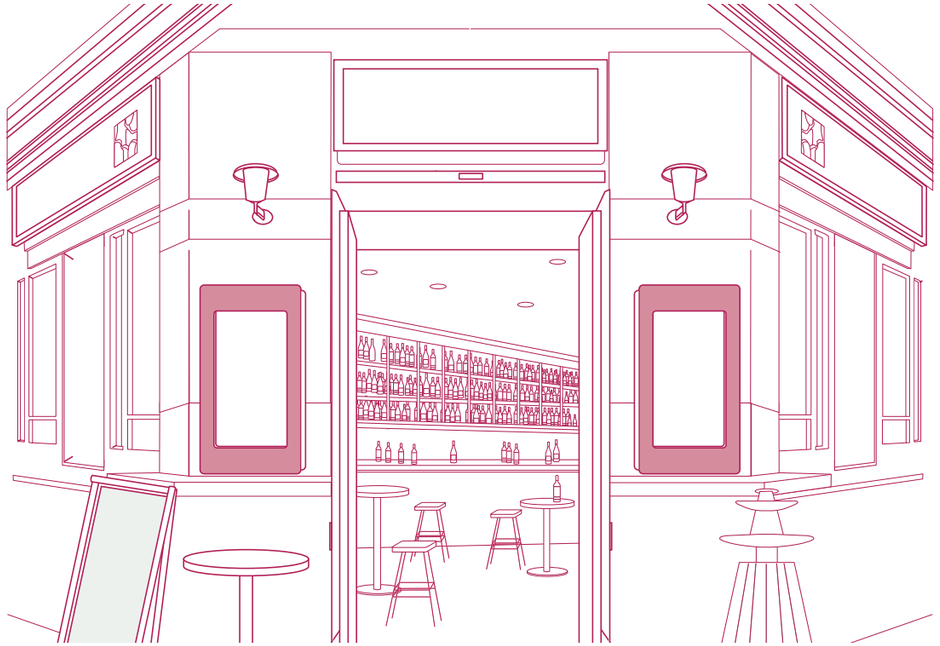

TAD-321

Vertically mode

Usage

You can place horizontally or vertically

Application

Resturants and Bars
Retail Stores
Fashion Shops

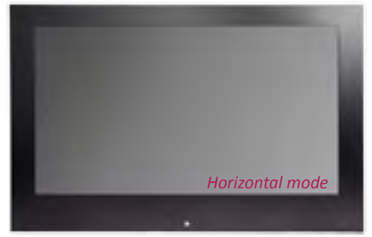

Horizontal mode

Size	32” TFT LCD, 1366 x 768
Aspect	16:9
Contrast	1200:1
Brightness	500cd/m2
Vesa	100, 200, 600 x 200 mm

Portrait Series Come With

Remote

Adapter

Manual

All Included

Supports JPEG, MPEG1, 2, 4, Music, Supports CF Type I/II, Automatic or password update by USB, Stereo Speakers, Auto-play on startup, Auto repeats.

CASE PICTURES

VENDING MACHINE

HOTEL

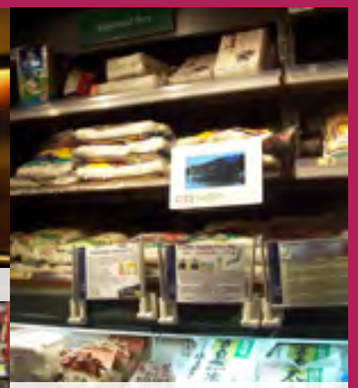

SUPER MARKET

TOYS

COSMETIC / HAIR CARE



HARDWARE STORES

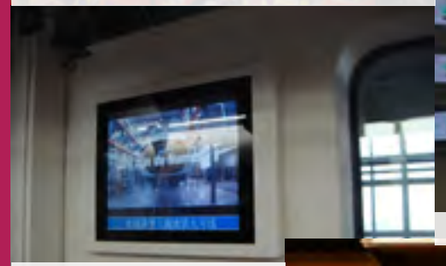

TRANSPORTATION

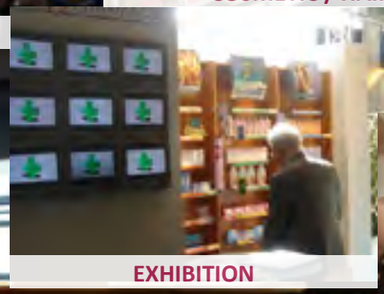

EXHIBITION

MUSEUM

FOOD

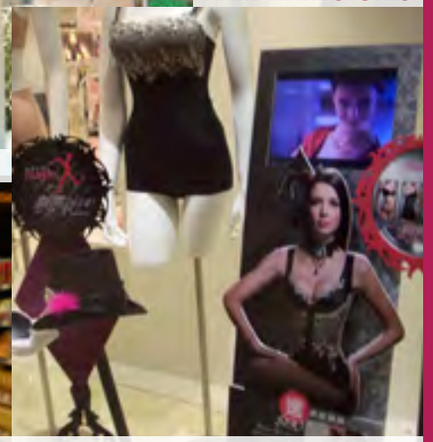

FASHION

SAL SERIES
aluminum made

SAL-149

Size	14.9” TFT LCD, 1280 x 390
Contrast	450:1
Brightness	250cd/m2
Vesa	75 x 75 mm

SAL-151

Size	15” TFT LCD, 1024 x 768
Aspect	4:3
Contrast	450:1
Brightness	250cd/m2
Vesa	75 x 75 mm

SAL-156

Size	15.6” TFT LCD, 1366 x 768
Aspect	16:9
Contrast	500:1
Brightness	250cd/m2
Vesa	75 x 75 mm

SAL-171

Size	17” TFT LCD, 1440 x 900
Aspect	16:9
Contrast	500:1
Brightness	250cd/m2
Vesa	75 x 75 mm

SAL-191

Size	19” TFT LCD, 1440 x 900
Aspect	16:9
Contrast	700:1
Brightness	300cd/m2
Vesa	75 x 75 mm

SAL-221

Size	22” TFT LCD, 1680 x 1050
Aspect	16:9
Contrast	1000:1
Brightness	300cd/m2
Vesa	100 x 100 mm

GAD SERIES
plastic made

GAD-073 -7” LCD Player Plastic Housing

Size	7” TFT LCD, 800 x 480
Aspect	16:9
Contrast	500:1
Brightness	250cd/m2

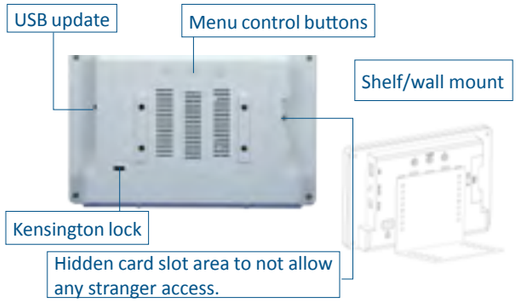

Optional Features

Button integration-maximum 8 blinking buttons

Volume wheeler or motion sensor extension

Battery operation

Application

GAD-073-Retail shelves

GAD-D-OF-Display integration

GAD073-D-OF -7” LCD Open Frame Player

Size	7” TFT LCD, 800 x 480
Aspect	16:9
Contrast	500:1
Brightness	250cd/m2

Buttons Activated

Motion Activated

Battery Activated

GAD Series Comes With



BUTTON

APPLY TO ALL TAD SERIES

THE MODEL USED?

TAD-073 with NOP with buttons

INCREASE CUSTOMER INTERACTION

HOW IT FUNCTIONS? EASY TO PROGRAM

- You can arrange files by renaming file names
- No external software required

PRODUCT CONSULTANT / PRODUCT SELECTOR

- Educate viewers the prefect product for them.

BUTTON INTERACTIVITY

- Customer can select the product / service they would like to view

BUTTON ON ENCLOSURE

TAD-151 WITH 9 BUTTONS

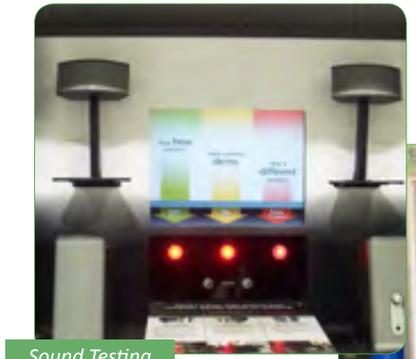

Sound Testing

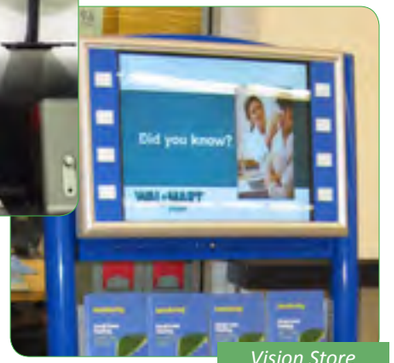

Vision Store

EXTERNAL BUTTONS

Housing

TAD-073 WITH BUTTONS

TAD-102 WITH BUTTONS

TAD-104 WITH BUTTONS

Open-frame

TAD073-NOP WITH BUTTONS

TAD104-NOP WITH BUTTONS

Telecom Services

LIFT SERIES

STEP 1

Video 1 Looping when no one lifts anything

STEP 2

When customer lifts the product, it would play video 2- the related video

Cell Phone Business

When a cellphone is lift, it will play related model information

APPLY TO ALL TAD SERIES

The concept is to create interaction between the customer and your product. When the customer lifts the product, they LCD would display a video related to that product. This would allow customer to understand the product that they are touching directly.

BARCODE

When a product with a barcode labelled is scanned, an ad or demo could be automatically displayed on the Advertising Displayer. The interactive technology enhances customer's linkage with the merchandise as well as watching a live demo at instance. The programming is superb where you merely need to name the files as the barcode number to co-relate.

Works with

TAD073-BS, TAD081-BS, TAD082-BS, TAD102-BS, TAD104-BS, TAD151-BS, TAD191-BS, TAD221-BS

HOW DOES IT WORK?

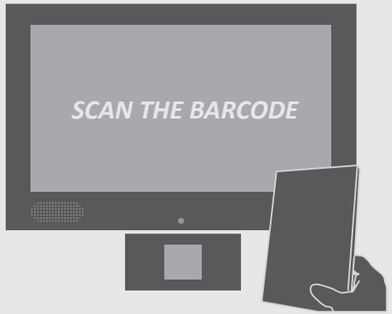

1) Select a product to exhibit

2) Scan the barcode

3) Watch the relevant video

The RS-232 interface triggers the incoming short codes. RS-232 devices, like barcode readers, can be programmed through the re-naming of the files. There are >1000 "goto" commands. It is an omni-directional barcode.

Compatible barcode standards:

	READABLE	DEFAULT ENABLE
ALL UPC/EAN/JAN	√	√
EAN 128 CODE	√	√
CODE 39	√	√
CODE 39 FULL ASCII	√	
CODE 32 / ITALIAN PHARMACY	√	
CODE 128	√	√
CODEBAR / NW 7	√	√
INTERLEAVE 25	√	√
INDUSTRIAL 25	√	
MATRIX 25	√	
MSI / PLESSEY	√	
TELEPEN	√	
CODE 93	√	
CODE 11	√	
CHINA POSTAGE	√	

TOUCHSCREEN & BARCODE

The unit would turn on with touch functions, when a product is scanned, it would show the corresponding file of the scarnned product. If nothing is scanner again, it would go back to the touch screen function.

BATTERY OPERATED

Glory Star Group TAD SERIES could be operated by rechargeble polymer lithium battery or D cell batteries.

TAD with lithium

TAD with D cell

HOW DOES IT WORK?

BUTTON ACTIVATION

BATTERY +

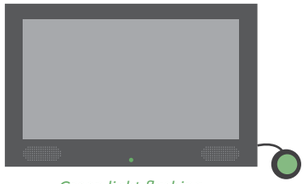

Green light flashing

Unit on standby mode when no one select the button. Flashing button to attract.

BATTERY +

When some one select the flashing button the player would turn on and play contents.

MOTION SENSOR ACTIVATION

BATTERY +

Sensor Standby light

Player on standby mode when no one passes by.

BATTERY +

3meters

When viewer passes by unit within 3 meters, unit turn onto play file once, then go back to standby mode, until someone passes by again.

HOW LONG DOES THE BATTERY LAST?

RECHARGEBLE POLYMER LITHIUM BATTERY

TAD-073 with button

	BATTERY	VOLTAGE	CHARGING TIME	CONTINUOUS PLAY	ACTIVATED TIMES
7”	22000mah	9.7V-12.6V	12-15 hours	32-34 hours	4080 times

STAND BY CONSUMPTION	CONSUMPTION	SIZE
3W (12V / 250MA)	7.5W (12V / 650MA) Volume loudest but varies with different moview	TAD-073(7” LCD)

TAD-073 with sensor

	BATTERY	VOLTAGE	CHARGING TIME	CONTINUOUS PLAY	ACTIVATED TIMES
10.4”	22000mah	9.7V-12.6V	12-15 hours	31-32 hours	3540 times

STAND BY CONSUMPTION	CONSUMPTION	SIZE
3W (12V / 250MA)	8W (12V / 650MA) Volume loudest but varies with different moview	TAD-104(10.4”LCD)

D-CELL BATTERY

TAD-073 with sensor

	BATTERY	VOLTAGE	CURRENT	CONTINUOUS PLAY	ACTIVATED TIMES
7”	8 D-CELL	8V-12.8V	10,000 mah	13-15 hours	1500 times
	16 D-CELL	8V-12.8V	20,000 mah	25-30 hours	3600 times

TAD-073 with button

	BATTERY	VOLTAGE	CURRENT	CONTINUOUS PLAY	ACTIVATED TIMES
10.4”	8 D-CELL	8V-12.8V	10,000 mah	13-14.5 hours	1740 times
	16 D-CELL	8V-12.8V	20,000 mah	27-29 hours	3480 times

NOTE: Single D-Cell Largest Voltage = 1.6V
Single D-Cell Smallest Voltage = 1V

TOUCH SCREEN

MULTI-LAYERED INTERACTIVE TOUCH

MODEL NO.

TAD073-TP, TAD081-TP, TAD082-TP, TAD102-TP, TAD104-TP, TAD151-TP, TAD191-TP, TAD221-TP

NO PC REQUIRED
Stand Alone Touch Screen with sturdy casing

EASY PROGRAMMING
Comes with an external software that allows you to control the layers and touch positions

AUTOMATED LOOPING VIDEO
Player would go back to looping video after certain period of time when no one selects.

PRODUCT ADVISOR
Customers can drill down layers to find the prefect product

1) Touch the screen to start the program

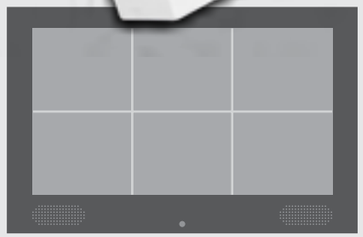

2) Navigate through a video menu

3) Select the video to watch

The touch screen series comes with a software which enables the creation of multi-layered interactive structure.
Avialiable in 7", 8", 10.2", 10.4", 15", 17", 19", 22"

DIGITAL SIGNAGE SERIES

CAPTIVATE. ENGAGE.

APPLY TO ALL TAD SERIES

THE DIGITAL ADVANTAGE

Traditional advertising are turning to digital media technology for dynamic creative that maximizes revenue and reduces clutter.Digital Signage added high imapact messaging with ability to reach customers in any targeted environment, and with all the flexibility to change media content instantly.

Features

1. Designed for digital signage
2. High definition video & digital audio
3. No Moving Parts and windows
4. Free Scheduling software - To enable content to be updated and managed through internet in one location. Able to set media contents to be played at certain time, location or arrange cycles of different media contents to be played throughout the year.
5. Customizable templates - Click and drag methods for video and pictures arrangements, able to show pictures and videos at the same time.
6. WatchDog Detection - Device will auto restart to recover once error is detected, thus reducing repair time
7. Media content security - All media contents require authorization from a higher level of administrator in order to process into the device.
8. Ethernet by LAN WIRE /Wifi compatiable
9. Real time monitoring

HOW IT WORKS

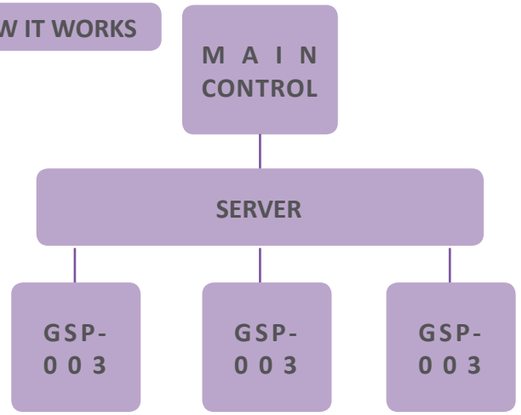

MODEL NO.

GSP-003 1080p HD Network Media Player

Networked Screens
TAD151-G3, TAD156-G3, TAD191-G3, TAD221-G3, TAD321-G3

SAL-149-G3, SAL-151-G3, SAL-156-G3, SAL-171-G3, SAL-191-G3, SAL-221-G3

SUPPORT

DIGITAL AUDIO HD 1080P HDMI

Technical Specifications:

Supported Video Files	Avi, Wmv, H.264, Mpeg1, 2 ,4
Supported Audio Files	Mp3, wav, Dolby Digital
Supported Picture Files	Jpeg, Png, Bmp
Video Resolution	Up to 720p
Nwtwork Connection	Lan / Wifi/ 3G
Output	VGA, RGB, HDMI, USB 2.0, LAN
Language	Traditional Chinese, Simplified Chinese, English
Working Temperature	0 °c to 55 °c

CMS SOFTWARE SPECIFICATION

CATEGORIES	FUNCTIONS	DESCRIPTION
MANAGEMENT	Split Screen Management	Customizable placement of video and multiple pictures in one screen
	Content Management	Able to upload all necessary content on server to access remotely
	Playlist Management	Able to set time, date, duration and additional data for content to be played atuser's choice.
SERVER MANAGEMENT	Server Control	Able to add, modify or delete existing device connected to server.
	Real Time Monitoring	Locate and monitor current distant device status in real time.
	Firmware Upgrade	Upgrade firmware remotely through server to device.
ADDITIONAL MANAGEMENT	Server Control	Able to set different access levels for security purpose.
	System Control	A complete history of all user's record for reference.

CATEGORIES	FUNCTIONS	DESCRIPTION
DISPLAY OPTIONS	Landscape/Portrait	Display contents vertical or horizontally.
DOWNLOAD MANAGEMENT	Multiple Download	Support multiple downloads in different time segments
	Continuous Download	Able to recover download when system restarts
	Time Synchronization	Sync time with server
	Schedule Download	Schedule different time zones to download
	Watch--Dog	Will detect any error in distant device automatically
AUTO CONTROL	Schedule On/Off	Schedule device to turn on/off at a certain time.
	Report Notification	All error in device will be reported to server administrator
	Self Recovery	Device will auto restart once error is detected.
SOFTWARE SUPPORT	Window XP, Vista,7	

AVP

LCD VIDEO POSTER

The combination of MPEG video and static poster in one body. The Poster can provide the most quintessential information for viewers while LCD can be an enterainment force.

- **Promote by video as well as static posters**
- **Can change poster anytime at effective cost for a fresh look.**
- **Easy to update video contents and poster**
- **Wall mount or hang by ceiling.**
- **2 sided- One side video and the other side poster .**

HOW TO USE?

Snap open the frame

Slip in poster then snap frame back

AVP-073

Size	7” TFT LCD, 800 x 480
Aspect	16:9
Contrast	500:1
Brightness	250cd/m2
Vesa	30 x 30 mm

AVP-102

Size	10.2” TFT LCD, 800 x 480
Aspect	16:9
Contrast	300:1
Brightness	250cd/m2
Vesa	75 mm

AVP-151

Size	15” TFT LCD, 1024 x 768
Aspect	4:3
Contrast	450:1
Brightness	250cd/m2
Vesa	75 mm

Super Market

Wall/Ceiling Mount

All Included

Supports JPEG, MPEG1, 2, 4, Music, Supports CF Type I/II, Automatic Update By USB, Stereo Speakers, Auto-play on startup, Auto repeats.

TAD Series Come With

Remote

Adapter

Manual

MEDIA AD STATION

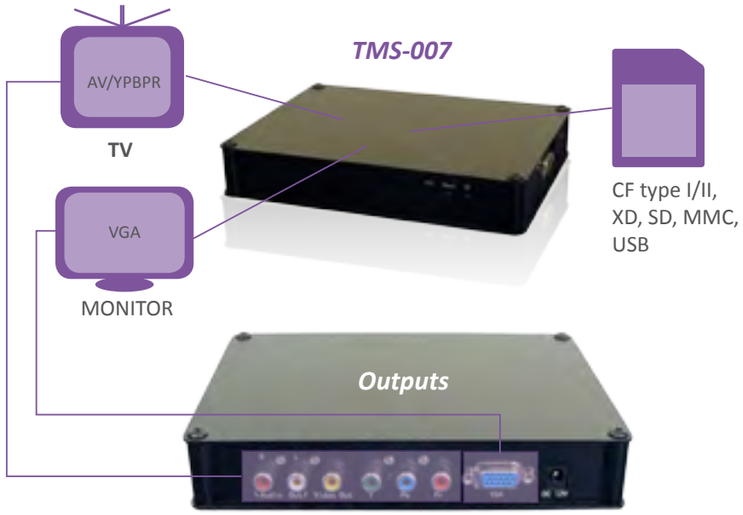

Reliability: Guaranteed for 3 years trouble free operation, 24/7 playback in non-managed environements

Plug & Play and fast auto-start

Instant response (no delay in content play out)

Easy Update (can insert USB thumb drive for automatic update or require password for update)

Interactive Options: offers full support interactive applicatios- from simple push button to motion sensor

Cost effective: Player competitive priced, total cost of ownership that guarantees an affordable digital media solution.

TMS-007 (720p)

Outputs: RGB, Ypbpr, VGA, RS232 (Optional) , 720p(1280x720p) Quality Image

Storage Medium: CF Card Type I/II, SD/MMC,/XD, USB,mini USB

GSP-001 (1080p)

Outputs: HDMI, Support image up to 1080p

Storage Medium: CF Card Type I/II, SD/MMC,/XD, USB,mini USB

VIDEO CONTROLLERS

Video Controller allows you to control video/jpegs on screen by selecting buttons. The application can be for interactive displays.

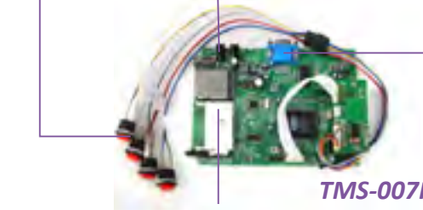

AUDIO CONTROLLERS

3.5MM STEREO JACK
(OPTIONAL)

CARD SLOTS

PLAY, STOP, NEXT, PERVIOUS, VOLUME

Audio controllers are for music/album demos or headphone sound quality demos. The 3.5mm stereo jack can connect to headphones for demo listening and navigate through the push / membrane buttons

POS DISPLAYS

This is a total solution provided where users can directly place the Ad displayers with stands at retail/ public areas.

32” Display Stand

Applicable	32”
Dimension	Height: 148cm (lowest), 180cm (tallest) Width: 85cm Depth: 39cm
Vesa	100, 200, 600 x 200 mm
Suitable	Entrance of bars and restaurant

15” Display Stand (ADS15)

Applicable	15”, 17”, 19”
Dimension	Height: 152cm Width: 44cm Depth: 21cm
Vesa	100, 200
Suitable	Entrance of bars and restaurant, Retail shops, Signage board

Touch-Screen Display Stand

Applicable	15”, 17”, 19” , 22”
Dimension	Height: 103cm Base: 35.5cm Back plate wide: 20cm
Vesa	100, 200
Suitable	Bars and restaurant manual, Retail shops

ASW-073

Applicable	7”
Dimension	Height: 28.3cm Width: 10cm Length: 23.5cm
Suitable	Cosmetic, Retail counters, Reception Desks

LB-7 with LED Light Box

Applicable	7”
Dimension	Height: 40cm Width: 21cm Length: 29cm
Suitable	Cosmetic, Retail shops, Reception Desks

POS Displays Come With

All Included

Supports JPEG, MPEG1, 2, 4, Music, Supports CF Type I/II, Automatic Update By USB, Stereo Speakers, Auto-play on startup, Auto repeats.

VIDEO CATALOG

BENEFITS

- *Excellent way to promote your company's products and services*
- *Replace the old way of handing out catalog- but re-invent with interactivity and video*
- *A good way to explain any complex services sold.*

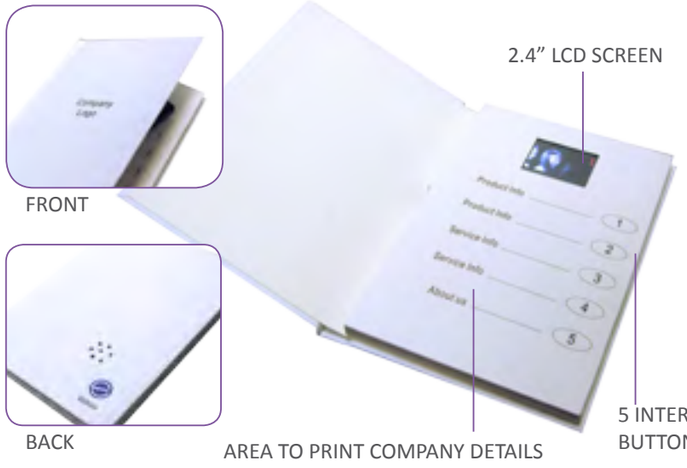

FEATURES

1.8" / 2.4" / 3.5" TFT LCD Player
Auto-start / Stop function when opening up the product
Integrated speakers
Internal Memory (1GB)
Video Player of 30 sec. to 60 mins (depending on flash memory)
Rechargeble lithium battery with USB port
optional menu through buttons for up to 5 buttons

MORE

3D BOX

An 3D image could be displayed through the 3D Box

LCD SHELF STRIP

The rectangular shape is designed to put on shelves to minimize space.

COIN TRAY

Designed to put coins on an 8" LCD displayer with a curved glass

SHELF TALKER

- *when a person passes by, the shelf talker would play the recording file to grasp attention.*
- *Supported Storage: SD / MMC card*
- *Supported Audio: Music format*
- *File Repeat Mode: Single / All*
- *Speaker: External 5W Speaker*
- *Built-in Motion Detector: Controlling power on/o status. When detects NO MOTION within 30 sec, auto switch to stand-by mode, When detects MOTION again, auto starts looping commerical audio clips.*
- *Auto-start, auto-lopping after connected power*
- *Card size remote control*

THE MOUNTING SYSTEM

Ready made solution of mounting in pole, shelf, table and wall

SHELF MOUNT

FIX-001 *SHELF MOUNT*

Applied Model:
TAD-073

FIX-004 *SHELF MOUNT*

Applied Model:
TAD-073
TAD-104

FIX-005 *SHELF MOUNT*

Applied Model:
TAD-171
TAD-191

TABLE MOUNT

FIX-003 *TABLE MOUNT*

Applied Model:
TAD-073
TAD-081
TAD-082
TAD-102
TAD-104

FIX-006 *TABLE MOUNT*

Applied Model:
TAD-151
TAD-171
TAD-191

FIX-011 *TABLE MOUNT*

Applied Model:
TAD-151
TAD-171
TAD-191

WALL MOUNT

FIX-013 *WALL MOUNT*

Applied Model:
TAD-261
TAD-321

WM015012S *WALL MOUNT*



Applied Model:
TAD-073
TAD-081
TAD-082
TAD-102
TAD-104

TAD-121
TAD-151
TAD-171
TAD-191
TAD-221

POLE MOUNT

FIX-007 *POLE MOUNT*

Applied Model:
TAD-151
TAD-171
TAD-191

CONTACT US

Glory Star Group Ltd.
www.glorystargroup.com

Flat D, 5/F, Excelsior Building,
364 Nathan Road, Kowloon,
Hong Kong
TEL:2376-2803
FAX:2376-2292
E-Mail:sales@glorystarcom.com

Glory Star Technics (ShenZhen) Co., Ltd.

4/ F, West Block,
Xi Li Villaga, Xin Wu Industry Building,
Nan Shan District, ShenZhen
China
TEL:86-755-2600-1808
FAX:86-755-2600-2933
E-mail:sales@glorystarcom.com

勁元科技 (深圳) 有限公司
深圳市南山區西麗鎮
新屋工業大廈西座 4 樓

SPECIFICATIONS

TAD SERIES SPECIFICATIONS

	Stand Alone			
Product Code	**TAD-073**	**TAD-081**	**TAD-082**	**TAD-102**
Picture				
External Frame	Yes	Yes	Yes	Yes
Color	Black	Black	Black	Black
Panel Size	7"	8.1"	8.2"	10 2"
Aspect Ratio (H x V)	16:9	4:3	16 9	16 9
Resolution	800*480	800x600	800x480	800*480
Cell type	TFT	TFT	TFT	TFT
Brightness (cd/m2)	250	250	350	250
Contrast Ratio	500:1	500: 1	300:1	300:1
Responese Time (ms)	15	15	15	16
Lamp Life Time (hrs)	20,000	20,000	20,000	30,000
Audio System	Stereo	Stereo	Stereo	Stereo
Supported Media Card	CF type I/II or SD,USB	CF Type I/II, USB up update content	CF Type I/II, USB to update content	CF type I/II or SD,USB
Supported File Format	Jpeg,Mpeg 1,2,4,Music	JPEG, MPEG1,2,4 music	JPEG, MPEG1,2,4 music	Jpeg,Mpeg 1,2,4,Music
Input	\	\	\	\
Remote Control	Yes	Yes	Yes	Yes
Motion Sensor	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/180/360 secs	Standby mode: programmable to 30/45mute/90/180/360 secs	Standby mode: programmable to 30/45mute/90/360 secs
Features	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, auto play, auto repeat, slideshow	Auto start, auto play, auto repeat, slideshow	Auto start, Auto Play, Auto Repeat, Slideshow
Optional Features (extra cost)	Button/Barcode/Touch/network	Button/Barcode/Touch/network	Button/Barcode/Touch/network	Button/Barcode/Touch/network

Optional Functions (extra cost)	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD+A22:E39
Scheduling Function	Yes	Yes	Yes	Yes
System Clock Display	Supply top left corner or top right corner display	Supply top left corner or top right corner display	Supply top left corner or top right corner display	Supply top left corner or top right corner display
USB Update	Yes	Yes	Yes	Yes
User Manual	English	English	English	English
Speakers	Built in Stereo Speaker (2W X 2)	Built in Stereo Speakers(2WX2)	Built in stereo speakers (2WX2)	Built in Stereo Speaker (2W X 2)
Anti-Glare Tempered Glass	Yes	Yes	Yes	Yes
Adaptor	External	External	External	External
Input Voltage	AC 100-240V, 50/60Hz	AC100-240V,50/60Hz	AC 100-240V,50-60Hz	AC 100-240V, 50/60Hz
Max Power Consumption	9W	11W	12W	18W
Physical Dimension (mm)	191(L)*35(W)*141(H)	215(L)*45(W)*190(H)mm	230(L)*40(W)*167(H)mm	282(L)*40(W)*203(H)
Physical Weight (kgs/pc)	1	1.9	1.7	2.4
Individual Carton Dimension (mm)	285(L)*200(W)*104(H)	346(L)*260(W)*90(H)mm	360(L)*260(W)*90(H)mm	388(L)*125(W)*282(H)
Individual Carton Weight (kgs)	1.55	2.5	8	3.2
Per Carton Packing (pcs/ctn)	10	4	5	4
Per Carton Dimension (mm)	420(L)*290(W)*540(H)	550(L)*380(W)*300(H) mm	550(L)*390(W)*300(H)mm	540(L)*400(W)*310(H)
Per Carton Weight (kgs)	17.3	11	12.7	13 3
Mounting Dimension (mm)	30*30	30*30/50*50	30*30/50*50	75*75

TAD SERIES SPECIFICATIONS

	Stand Alone			
Product Code	**TAD-104**	**TAD-121**	**TAD-151**	**TAD-156**
Picture				
External Frame	Yes	Yes	Yes	Yes
Color	Black	Black	Black	Black
Panel Size	10.4"	12.1"	15"	15.6"
Aspect Ratio (H x V)	4:3	4:3	4:3	16 9
Resolution	800*600	800*600	1024*768	1366*768
Cell type	TFT	TFT	TFT	TFT
Brightness (cd/m2)	250	330	250	250
Contrast Ratio	400:1	450:1	450:1	500:1
Responese Time (ms)	10	10	16	5
Lamp Life Time (hrs)	20,000	40,000	40,000	50,000
Audio System	Stereo	Stereo	Stereo	Stereo
Supported Media Card	CF type I/II or SD,USB	CF type I/II or SD,USB	CF type I/II or SD,USB	CF type I/II or SD,USB
Supported File Format	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music
Input	\	VGA, Video (optional) Line Input (3.5mm Stereo)	VGA, Video (optional) Line Input (3.5mm Stereo)	VGA, Video (optional) Line Input (3.5mm Stereo)
Remote Control	Yes	Yes	Yes	Yes
Motion Sensor	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs
Features	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow
Optional Features (extra cost)	Button/Barcode/Touch/network	Button/Barcode/Touch/network	Button/Barcode/Touch/network	Button/Barcode/Touch/network
Optional Functions (extra cost)	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD
Scheduling Function	Yes	Yes	Yes	Yes
System Clock Display	Supply top left corner or top right corner display	Supply top left corner or top right corner display	Supply top left corner or top right corner display	Supply top left corner or top right corner display
USB Update	Yes	Yes	Yes	Yes
User Manual	English	English	English	English
Speakers	Built in Stereo Speaker (2W X 2)	Built in Stereo Speaker (2W X 2)	Built in Stereo Speaker (5W X 2)	Built in Stereo Speaker (5W X 2)
Anti-Glare Tempered Glass	Yes	Yes	Yes	Yes
Adaptor	External	External	Internal	Internal
Input Voltage	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz
Max Power Consumption	18W	21W	35W	35W
Physical Dimension (mm)	264(L)*40(W)*230(H)	310(L)*45(W)*270(H)	366(L)*50(W)*320(H)	402(L)*50(W)*286(H)
Physical Weight (kgs/pc)	2.3	4.3	4.85	4.85
Individual Carton Dimension (mm)	355(L)*124(W)*320(H)	450(L)*115(W)*365(H)	440(L)*130(W)*435(H)	495(L)*135(W)*390(H)
Individual Carton Weight (kgs)	3.2	4	5	5
Per Carton Packing (pcs/ctn)	4	3	3	3
Per Carton Dimension (mm)	520(L)*370(W)*340(H)	475(L)*370(W)*390(H)	455(L)*393(W)*448(H)	510(L)*425(W)*400(H)
Per Carton Weight (kgs)	13 3	13 3	17	17
Mounting Dimension (mm)	75*75	75*75	75*75	75*75

TAD SERIES SPECIFICATIONS

	Stand Alone			
Product Code	**TAD-171**	**TAD-191**	**TAD-221**	**TAD-321**
Picture				
External Frame	Yes	Yes	Yes	Yes
Color	Black	Black	Black	Black
Panel Size	17"	19"	22"	32"
Aspect Ratio (H x V)	16:9	16:9	16 9	16 9
Resolution	1440*900	1440*900	1680*1050	1366*768
Cell type	TFT	TFT	TFT	TFT
Brightness (cd/m2)	250	300	300	500
Contrast Ratio	500:1	700:1	1000:1	1200:1
Responese Time (ms)	5	5	5	8
Lamp Life Time (hrs)	30,000	50,000	50,000	50,000
Audio System	Stereo	Stereo	Stereo	Stereo
Supported Media Card	CF type I/II or SD,USB	CF type I/II or SD,USB	CF type I/II or SD,USB	CF type I/II or SD,USB
Supported File Format	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music
Input	VGA, Video (optional) Line Input (3.5mm Stereo)	VGA, Video (optional) Line Input (3 5mm Stereo)	VGA, Video (optional) Line Input (3 5mm Stereo)	VGA, Video (optional) Line Input (3.5mm Stereo)
Remote Control	Yes	Yes	Yes	Yes
Motion Sensor	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs
Features	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow
Optional Features (extra cost)	Button/Barcode/Touch/network	Button/Barcode/Touch/network	Button/Barcode/Touch/network	Button/Barcode/Touch/network
Optional Functions (extra cost)	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD
Scheduling Function	Yes	Yes	Yes	Yes
System Clock Display	Supply top left corner or top right corner display	Supply top left corner or top right corner display	Supply top left corner or top right corner display	Supply top left corner or top right corner display
USB Update	Yes	Yes	Yes	Yes
User Manual	English	English	English	English
Speakers	Built in Stereo Speaker (5W X 2)	Built in Stereo Speaker (5W X 2)	Built in Stereo Speaker (5W X 2)	Built in Stereo Speaker (5W X 2)
Anti-Glare Tempered Glass	Yes	Yes	Yes	Yes
Adaptor	Internal	Internal	Internal	Internal
Input Voltage	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz
Max Power Consumption	36W	38W	48W	150W
Physical Dimension (mm)	430(L)*52(W)*320(H)	472(L)*60(W)*346(H)	585(L)*58(W)*390(H)	814(L)*88(W)*500(H)
Physical Weight (kgs/pc)	6	8.25	9.6	21
Individual Carton Dimension (mm)	485(L)*135(W)*445(H)	575(L)*140(W)*480(H)	575(L)*160(W)*540(H)	1030(L)*220(W)*755(H)
Individual Carton Weight (kgs)	6.64	9.25	11.5	22
Per Carton Packing (pcs/ctn)	3	2	2	1
Per Carton Dimension (mm)	505(L)*415(W)*460(H)	595(L)*300(W)*490(H)	695(L)*323(W)*560(H)	1030(L)*220(W)*755(H)
Per Carton Weight (kgs)	21	19.7	23 3	22
Mounting Dimension (mm)	75*75	75*75	100*100	100*100 / 200*200 / 200*3

TAD SERIES SPECIFICATIONS

	Open Frame		
Product Code	**TAD073-NOP**	**TAD104-NOP**	**TAD-151-NOP**
Picture			
External Frame	Yes	Yes	Yes
Color	Black	Black	Black
Panel Size	7"	10.4"	15"
Aspect Ratio (H x V)	16:9	4:3	4:3
Resolution	800*480	800*600	1024*768
Cell type	TFT	TFT	TFT
Brightness (cd/m2)	250	250	250
Contrast Ratio	500:1	400:1	450:1
Responese Time (ms)	15	10	16
Lamp Life Time (hrs)	20,000	20,000	40,000
Audio System	Stereo	Stereo	Stereo
Supported Media Card	CF type I/II or SD,USB	CF type I/II or SD,USB	CF type I/II or SD,USB
Supported File Format	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music
Input	\	\	VGA, Video (optional) Line Input (3.5mm Stereo)
Remote Control	Yes	Yes	Yes
Motion Sensor	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs
Features	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow
Optional Features (extra cost)	Button/Barcode/Touch	Button/Barcode/Touch	Button/Barcode/Touch

Optional Functions (extra cost)	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu set ing Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu set ing Password for content changing Chinese OSD
Scheduling Function	Yes	Yes	Yes
System Clock Display	Supply top left corner or to	Supply top left corner or to	Supply top left corner or to
USB Update	Yes	Yes	Yes
User Manual	English	English	English
Speakers	Built in Stereo Speaker (2\	Built in Stereo Speaker (2\	Built in Stereo Speaker (5\
Anti-Glare Tempered Glass	\	Yes	Yes
Adaptor	External	External	Internal
Input Voltage	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz
Max Power Consumption	9W	18W	35W
Physical Dimension (mm)	191(L)*35(W)*141(H)	264(L)*40(W)*230(H)	366(L)*50(W)*320(H)
Physical Weight (kgs/pc)	1	2.3	4.85
Individual Carton Dimension (mm)	285(L)*200(W)*104(H)	355(L)*124(W)*320(H)	440(L)*130(W)*435(H)
Individual Carton Weight (kgs)	1.55	3.2	5
Per Carton Packing (pcs/ctn)	10	4	3
Per Carton Dimension (mm)	420(L)*290(W)*540(H)	520(L)*370(W)*340(H)	455(L)*393(W)*448(H)
Per Carton Weight (kgs)	17.3	13.3	17
Mounting Dimension (mm)	\	\	\

GAD SERIES SPECIFICATIONS

	GAD Series		
Product Code	**GAD073-P (Enclosed)**	**GAD073-P (open frame-analog)**	**GAD073-P (open frame-digital)**
Picture			
External Frame	Yes	Yes	Yes
Color	Black or White	Black	Black
Panel Size	7"	7"	7"
Aspect Ratio (H x V)	16:9	16:9	16:9
Resolution	800*480	480*234	800*480
Cell type	TFT	TFT	TFT
Brightness (cd/m2)	250	250	250
Contrast Ratio	500:1	300:1	500:1
Responese Time (ms)	15	16	15
Lamp Life Time (hrs)	20,000	20,000	20,000
Audio System	Stereo	Stereo	Stereo
Supported Media Card	SD,USB	SD,USB	SD,USB
Supported File Format	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music
Input	\	\	\
Remote Control	Yes	Yes	Yes
Motion Sensor	Standby mode: programmable to 30/45mute/90/360 secs	Op ional (external)	Optional (external)
Features	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow
Optional Features (extra cost)		Maximum 4 buttons	Buttons

Optional Functions (extra cost)	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD		
Scheduling Function	\	\	Yes
System Clock Display	\	\	Yes
USB Update	Yes	\	Yes
User Manual	English	English	English
Speakers	Built in Stereo Speaker (1W X 2)	Built in Stereo Speaker (1W X 2)	Built in Stereo Speaker (1W X 2)
Anti-Glare Tempered Glass	\	\	\
Adaptor	External	External	External
Input Voltage	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz
Max Power Consumption	9W	9W	9W
Physical Dimension (mm)	189(L)*35(W)*119(H)	190(L)*28(W)*105(H)	190(L)*28(W)*105(H)
Physical Weight (kgs/pc)	0.35	0 33	0.33
Individual Carton Dimension (mm)	262(L)*135(W)*74(H)	262(L)*135(W)*74(H)	262(L)*135(W)*74(H)
Individual Carton Weight (kgs)	0.62	0.6	0.6
Per Carton Packing (pcs/ctn)	20	30	30
Per Carton Dimension (mm)	555(L)*280(W)*375(H)	660(L)*590(W)*190(H)	660(L)*590(W)*190(H)
Per Carton Weight (kgs)	13.5	12	12
Mounting Dimension (mm)	30*75	30 / 50 / 75*182	30 / 50 / 75*182

SAL SERIES SPECIFICATIONS

	SAL Series		
Product Code	**SAL-149**	**SAL-151**	**SAL-156**
Picture			
External Frame	Yes	Yes	Yes
Color	Silver Aluminum	Silver Aluminum	Silver Aluminum
Panel Size	14.9"	15"	15.6"
Aspect Ratio (H x V)	8:3	4:3	16:9
Resolution	1280*390	1024*768	1366*768
Cell type	TFT	TFT	TFT
Brightness (cd/m2)	250	250	250
Contrast Ratio	450:1	450:1	500:1
Responese Time (ms)	16	16	5
Lamp Life Time (hrs)	40,000	40,000	50,000
Audio System	Stereo	Stereo	Stereo
Supported Media Card	SD,USB	SD,USB	SD,USB
Supported File Format	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music
Input	\	\	\
Remote Control	Yes	Yes	Yes
Motion Sensor	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs
Features	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow
Optional Features (extra cost)	Network	Network	Network

Optional Functions (extra cost)	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu set ing Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu set ing Password for content changing Chinese OSD
Scheduling Function	Yes	Yes	Yes
System Clock Display	Supply top left corner or top right corner display	Supply top left corner or top right corner display	Supply top left corner or top right corner display
USB Update	Yes	Yes	Yes
User Manual	English	English	English
Speakers	Built in Stereo Speaker (2W X 2)	Built in Stereo Speaker (5W X 2)	Built in Stereo Speaker (5W X 2)
Anti-Glare Tempered Glass	Yes	Yes	Yes
Adaptor	External	External	External
Input Voltage	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz
Max Power Consumption		35W	35W
Physical Dimension (mm)	428(L)*45(W)*183(H)	347(L)*45(W)*327(H)	384(L)*45(W)*280(H)
Physical Weight (kgs/pc)	3.1	4	4
Individual Carton Dimension (mm)	550(L)*85(W)*280(H)	480(L)*85(W)*420(H)	518(L)*85(W)*380(H)
Individual Carton Weight (kgs)		5.4	5.6
Per Carton Packing (pcs/ctn)	4	3	3
Per Carton Dimension (mm)	580(L)*340(W)*310(H)	500(L)*260(W)*450(H)	535(L)*260(W)*400(H)
Per Carton Weight (kgs)		17.5	19
Mounting Dimension (mm)	75*75	75*75	75*75

SAL SERIES SPECIFICATIONS

	SAL Series		
Product Code	**SAL-171**	**SAL191**	**SAL-221**
Picture			
External Frame	Yes	Yes	Yes
Color	Silver Aluminum	Silver Aluminum	Silver Aluminum
Panel Size	17"	19"	22"
Aspect Ratio (H x V)	16:9	16:9	16:9
Resolution	1440*900	1440*900	1680*1050
Cell type	TFT	TFT	TFT
Brightness (cd/m2)	250	300	300
Contrast Ratio	500:1	700:1	1000:1
Responese Time (ms)	5	5	5
Lamp Life Time (hrs)	30,000	50,000	50,000
Audio System	Stereo	Stereo	Stereo
Supported Media Card	SD,USB	SD,USB	SD,USB
Supported File Format	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music
Input	\	\	\
Remote Control	Yes	Yes	Yes
Motion Sensor	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs	Standby mode: programmable to 30/45mute/90/360 secs
Features	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow
Optional Features (extra cost)	Network	Network	Network

Optional Functions (extra cost)	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu set ing Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen adjustment Real Time Display Logo Display on each video Data logging Password for menu set ing Password for content changing Chinese OSD
Scheduling Function	Yes	Yes	Yes
System Clock Display	Supply top left corner or top right corner display	Supply top left corner or top right corner display	Supply top left corner or top right corner display
USB Update	Yes	Yes	Yes
User Manual	English	English	English
Speakers	Built in Stereo Speaker (5W X 2)	Built in Stereo Speaker (5W X 2)	Built in Stereo Speaker (5W X 2)
Anti-Glare Tempered Glass	Yes	Yes	Yes
Adaptor	External	External	External
Input Voltage	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz
Max Power Consumption	36W	38W	48W
Physical Dimension (mm)	409(L)*45(W)*320(H)	448(L)*45(W)*343(H)	514(L)*45(W)*385(H)
Physical Weight (kgs/pc)	4.5	5.4	7
Individual Carton Dimension (mm)	543(L)*85(W)*418(H)	580(L)*85(W)*440(H)	648(L)*85(W)*485(H)
Individual Carton Weight (kgs)	6	7.5	10
Per Carton Packing (pcs/ctn)	3	2	2
Per Carton Dimension (mm)	560(L)x260(W)x445(H)	600(L)*180(W)*465(H)	665(L)*180(W)*510(H)
Per Carton Weight (kgs)	19.5	15.5	20
Mounting Dimension (mm)	75*75	75*75	100*100

BATTERY OPERATED SERIES

BATTERY	D Cell battery Casings	22000 mah Rechargeble Lithium Battery
Picture		
Battery Size	2x8 D cell battery	22000 mah Rechargeble Lithium Battery
Current	20,000mah	22000mah
Input Voltage	8V-12V	12.6V
Output Voltage	8V-12V	12V
Charging Time	No re-charging	8 hour
Physical Dimension (mm)	208*198*45(thickness)mm	243(L)*146(W)*42(thickness)
Physical Weight (kgs/pc)	N/A	1.85
Individual Packing Dimension	(2x8 D cell battery)290(L)*X250(W)*X166(H) mm	260(L)*160(W)*65(H)mm
Weight (Individual Packing) (kgs)	N/A	1.9
Per Carton Packing (Pcs/Carton)	5X(2x8 D cell battery)	4
Per Carton Dimension	865(L)*275(W)*315(H)mm	330(L)*280(W)*155(H)m,m
Per Carton Weight (kgs)	N/A	8.2
Mounting Dimension	No	145*145

POS DISPLAY SPECIFICATIONS

Digital POS display	ASW-073	LB-7	ADS-15	ADS-32	ADS-19
LCD Screen Size	7"	7"	15",17",19'	32"	17",19",22"
Application	reception, retail	recpetion	Entrance stand	restaurant and bar entrance	Menus at entrance or instore
Physical Dimension	235(L)*283(W)*100(H)mm	290(L)*400(W)*210(H)mm	1520(L)*440(W)*210(H)mm	1800(H)*850(W)*390(Depth)mm	1030(H)*355(Base)*200(back plate width)mm
Physical Weight (kgs/pcs)	1 9kgs	3 6kgs	15kgs	N/A	N/A
Individual Packing Dimension	360(L)*125(W)*320(H)mm	360(L)*285(W)*480(H)mm	N/A	N/A	N/A
Weight (Individual Packing) (kgs)	2.7kgs	5 5kgs	N/A	N/A	N/A
Per Carton Packing (pcs/ Carton)	4	2	N/A	N/A	N/A
Per Carton Dimension	520(L)*370(W)*340(H)mm	575(L)*370(W)*500(H)mm	N/A	N/A	N/A
Per Carton Weight (kgs)	11.5kgs	12.5kgs	N/A	N/A	N/A
Mounting Dimensions	N/A	N/A		100,200,600x200mm	100,200mm

SPECIFICATIONS

Media Ad Stations/ Video and Audio Controllers	TMS-007	TMS-007P (Video)	TMS-007P (Audio)	TSB-004 (Shelf Talker)
TV System	NTSC/PAL/720P	NTSC/PAL/720P	NTSC/PAL/720P	\
Audio System	Stereo	Stereo	Stereo	Stereo
Supported Media Card	SD/SM/XD/MS/MMC/CF	SD/SM/XD/MS/MMC/CF	SD/SM/XD/MS/MMC/CF	SD
Supported File Format	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Music
Input	\	\	\	\
Output	AV/YPBPR/VGA	AV/YPBPR/VGA	No	\
Remote Control	Yes	Yes	Yes	Yes
Motion Sensor	Optional	Optional	Optional	Standby mode: programmable to 30/90/180/360 secs
Features	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat
Optional Features (extra cost)	Buttons (blinking/membrane)	Buttons (blinking/membrane)	Buttons (blinking/membrane)	
Optional Functions (extra cost)	Pop Up Ad Scrolling text Vertical Horizontal Screen Adjustment Real Time Display Logo Display on each video Data Logging Password for menu setting Password for content changing Chinese OSD	Pop Up Ad Scrolling text Vertical Horizontal Screen Adjustment Real Time Display Logo Display on each video Data Logging Password for menu setting Password for content changing Chinese OSD		
USB Update	Yes	Yes	Yes	\
User Manual	English	English	English	English
Speaker	\	\	\	Built in Stereo Speaker (2W X 1)
Adaptor	External	External	External	External
Input Voltage	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz
Max Power Consumption	2 5W	2.5W	2 5W	1W
Physical Dimension (mm)	183(L)*134(W)*36(H)mm	170(L)*116(W)*13(H)mm	170(L)*116(W)*13(H)mm	139(L)*38(W)*90(H)mm
Physical Weight (kgs/pcs)	0 35kgs	0.56kgs	0 56kgs	0.2kgs
Individual Packing Dimension (mm)	250(L)*195(W)*78(H)m	N/A	N/A	246(L)*196(W)*80(H)mm
Weight (Individual Packing)kgs	0 5kgs	N/A	N/A	0.4kg
Per Carton Packing	10	40	40	10
Per Carton Dimension (mm)	405(L)*255(W)*4009H)mm	510(L)*490(W)*540(H)mm	510(L)*490(W)*540(H)	405(L)*255(W)*400(H)mm
Per Carton Weight (kgs)	7kgs	24.8kgs	24.8kgs	6.5kgs

AVP SERIES SPECIFICATIONS

	AVP Series		
Product Code	**AVP-073**	**AVP-102**	**AVP-151**
Picture			
External Frame	Yes (Snap Frame)	Yes (Snap Frame)	Yes (Snap Frame)
Color	Silver	Silver	Silver
Panel Size	7"	10.2"	15"
Aspect Ratio (H x V)	16:9	16:9	4:3
Resolution	480*234	800*600	1024*768
Cell type	TFT	TFT	TFT
Brightness (cd/m2)	250	250	250
Contrast Ratio	300:1	400:1	450:1
Responese Time (ms)	16	10	16
Lamp Life Time (hrs)	20,000	30,000	40,000
Audio System	Stereo	Stereo	Stereo
Supported Media Card	CF type I/II ,USB	CF type I/II ,USB	CF type I/II ,USB
Supported File Format	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music	Jpeg,Mpeg 1,2,4,Music
Input	\	\	\
Remote Control	Yes	Yes	Yes
Motion Sensor	\	\	\
Features	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow	Auto start, Auto Play, Auto Repeat, Slideshow

Scheduling Function	\	\	\
System Clock Display	\	\	\
USB Update	Yes	Yes	Yes
User Manual	English	English	English
Speakers	Built in Stereo Speaker (2W X 2)	Built in Stereo Speaker (2W X 2)	Built in Stereo Speaker (5W X 2)
Anti-Glare Tempered Glass	Yes	Yes	Yes
Adaptor	External	External	External
Input Voltage	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz
Max Power Consumption	10W	14W	35W
Physical Dimension (mm)	316(L)*41(W)*277(H)	435(L)*41(W)*312(H)	608(L)*41(W)*435(H)
Physical Weight (kgs/pc)	1.33	2.17	3.7
Individual Carton Dimension (mm)	403(L)*105(W)*310(H)	490(L)*122(W)*437(H)	720(L)*515(W)*145(H)
Individual Carton Weight (kgs)	2	3	6.4
Per Carton Packing (pcs/ctn)	5	3	2
Per Carton Dimension (mm)	535(L)*412(W)*330(H)	455(L)*377(W)*524(H)	736(L)*527(W)*300(H)
Per Carton Weight (kgs)	10.5	10.5	14.5
Mounting Dimension (mm)	\	\	\

SPECIFICATIONS

	TAD-024EC	3.5inch Shelf	8inch Coin Tray	3D Box
Picture				
External Frame	Yes	Yes	Yes	Yes
Panel Size	2.4inch	3.5inch	8.1"	7"
Aspect Ratio (H x V)	4:3	4:3	4:3	16:9
Resolution	320x240	320x420	800x600	800*480
Cell type	TFT	TFT	TFT	TFT
Brightness (cd/m2)	290	300	250	250
Contrast Ratio	350	350	500: 1	500:1
Responese Time (ms)	20	25	15	15
Lamp Life Time (hrs)	20,000			20,000
Audio System	Mini speaker	Mini speaker	Stereo	Stereo
Supported Media Card	Nand flash, USB	Micro SD	CF Type I/II, USB up update content	CF type I/II or SD,USB
Supported File Format	AVI (XVID)	AVI(XVID)	JPEG, MPEG1,2,4 music	Jpeg,Mpeg 1,2,4,Music
Input	No	No	\	\
Remote Control	No	Op ional	Yes	Yes
Motion Sensor	No	No	Standby mode: programmable to 30/45mute/90/180/360 secs	Standby mode: programmable to 30/45mute/90/360 secs
Other Features	5 buttons to select videos/jpegs	Auto-start,auto play, control button at back	Auto start, auto play, auto repeat, slideshow	Auto start, Auto Play, Auto Repeat, Slideshow
Scheduling Function	No	No	Yes	Yes
System Clock Display	No	No	Supply top left corner or top right corner display	Supply top left corner or top right corner display
USB Update	USB to load info in flash (by PC)	USB to load info in flash (by PC)	Yes	Yes
User Manual	No	No	English	English
Speakers	0.5W	1W	Built in Stereo Speakers(2WX2)	Built in Stereo Speaker (2W X 2)
Anti-Glare Tempered Glass	No	No	Yes	Yes

Adaptor	No adaptor but comes with USB cable	Yes and USB cable Adaptor or Battery (Optional)	Yes	Yes
Input Voltage	5V DC	5V DC	AC100-240,50/60Hz	AC 100-240V, 50/60Hz
Max Power Consumption	0.6W	1.5W	11W	7.5W
Physical Dimension (mm)	229(L)*156(W)*18(H)mm	N/A	285*241*75*64.76mm	250(L)*175(W)*184(H)mm
Physical Weight (kgs/pc)	0.34kgs	N/A	N/A	N/A
Individual Carton Dimension (mm)	268(L)*68(W)*26 (H)mm	N/A	345(L)*120(W)*298(H)mm	N/A
Individual Carton Weight (kgs)	0.43kgs	N/A	N/A	N/A
Per Carton Packing (pcs/ctn)	25	N/A	N/A	N/A
Per Carton Dimension (mm)	675(L)*288(W)*195(H)mm	N/A	N/A	N/A
Per Carton Weight (kgs)	11.75kgs	N/A	N/A	N/A
Mounting Dimension (mm)	N/A	N/A	75*75mm	N/A

GSP-003	
Physica Dimension	225(L)*205(W)*45(H)mm
Physical Weight(kgs/pc)	1.1kgs
Individual Packing Dimension	390(L)*90(W)*260(H)mm
Weight (Individual Packing)kgs	1.3kgs
Per Carton Packing (pcs /Carton)	5
Per Carton Dimension	530(L)*390(W)*305(H)mm
Per Carton Weight (kgs)	7.5kgs
Mounting Dimension	N/A

THE
MOUNTING SYSTEM SPECIFICATIONS

	Shelf Mount				Table Mount		
	FIX-001	FIX-004	FIX-005	GAD mount	FIX-003	FIX-006	FIX-011
Picture							
Where to install	Shelf	Shelf	Shelf	Shelf	Table	Table	Table
Application	7"	7"-12.1"	15"-17"	GAD073-P	7"-10.4"	15",17",19"	15"-19"
Physical Dimension (mm)	88*55*92	175*180*134	200*150*300	96*90*98	250*155*180	280x280x275mm	298*164*323
Physical Weight (kgs/pcs)	0.15	1	1.7	0.186	0.5	2	1.3
Individual Packing Dimension (mm)	65*115*90	190*145*195	160*310*230	N/A	260*170*200	N/A	345*175*58
Weight (Individual packing)- kgs	0.25	1.1	2	N/A	0.6	2.5	1.5
Per Carton Packing (pcs/ Carton)	40	6	4	N/A	8	5	8
Per Carton Dimension (mm)	350*255*400	410*450*220	340*470*330	N/A	540*360*440	295x615x340	470*360*210
Per Carton Weight (kgs)	11.5	7.2	9.5	N/A	7.5	12 5	12.7
VESA (mm)	30*30	30*30/75*75	75*75	N/A	30*30/75*75	75*75	75*75

	WALL MOUNT		Pole Mount
	FIX-013	WM015012S	FIX-007
Picture			
Where to install	WALL	WALL	POLE
Application	26"-32"	7"-22"	10.4"
Physical Dimension (mm)	470*430*28	145*122*13	305*95*75
Physical Weight (kgs/pcs)	1,75	0.5	1
Individual Packing Dimension (mm)	490*230*30	150*135*25	N/A
Weight (Individual packing)- kgs	1.95	0.6	N/A
Per Carton Packing (pcs/ Carton)	5	20	N/A
Per Carton Dimension (mm)	510*250*140	290*290*160	N/A
Per Carton Weight (kgs)	10.5	14 5	N/A
VESA (mm)	200*200/200*400/400*400	30*30/75*75/100*100	75*75

GLORY STAR GROUP LIMITED

© ALL RIGHT RESERVED.